


# Outdoor Banners

## Technical Specifications

### Size Guide

Minimum: 0.5m x 1m

Maximum: 3m x 15m

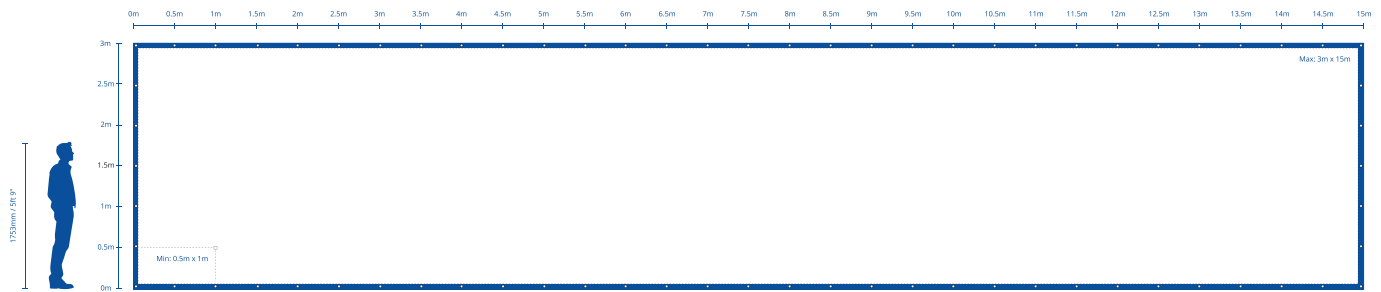

### Mounting Instructions

Follow these straightforward steps to secure your banner effectively:

- Use the provided heavy-duty cable ties for easy, secure mounting.
- Allow the banner's weight to naturally reduce creases as it hangs.
- Ensure an even, balanced tension across the banner to prevent overstretching.

#### Alternative Mounting Options:

For added flexibility, consider bungee cords, screws, or rope, depending on your installation needs.

### Care Instructions

To maintain the quality and longevity of your banner:

- Clean regularly with a damp cloth to remove dirt and debris.
- Avoid harsh chemicals or abrasive cleaning materials.
- Store rolled (not folded) in a cool, dry place when not in use.
- Remove in extreme weather, such as high winds, to prevent damage.
- Ensure proper tensioning during installation to minimise unnecessary strain.
- Periodically check eyelets and edges for wear and tear, particularly after storms.

Additional Information

Materials Information	<p><b>440gsm Banner PVC</b></p> <p>Description: Laminated PVC banner material; water-resistant and weatherproof.</p> <p>Tensile Strength: Warp 635 / Weft 451 N/5cm</p> <p>Tear Strength: Warp 125 / Weft 107 N</p> <p>Temperature Resistance: -20°C to 70°C</p> <p><b>360gsm Kavalan Greyback</b></p> <p>Description: Lightweight, phthalate-free, UV-protected, PVC-free polyester yarn.</p> <p>Tensile Strength: Warp 290 / Weft 260 N/5cm</p> <p>Tear Strength: Warp 33 / Weft 30 N</p> <p>Temperature Resistance: -40°C to 90°C</p> <p>Flame Retardant Standards:</p> <ul style="list-style-type: none"><li>DIN4102- B1</li><li>EN13501- 1</li><li>NFPA701</li><li>TS62</li></ul> <p><b>370gsm Mesh PVC</b></p> <p>Description: PVC mesh with 25% airflow; ideal for low-level building wraps and windy conditions. Expanse MB3 Mesh Banner works well as a wrap on one-to-two storey buildings.</p> <p>Tensile Strength: Warp 1250 / Weft 1100 N/5cm</p> <p>Tear Strength: Warp 235 / Weft 220 N</p> <p>Temperature Resistance: -20°C to 70°C</p>
Printing Process	Drop-on-demand digital inkjet printing.
Finishing Method	<p>Stitched and hemmed edges.</p> <p>Plastic eyelets every 50cm or in all four corners for easy, secure installation.</p> <p>Optional: No eyelets available on request.</p> <p>Cable ties included.</p>
Environment	Suitable for both indoor and outdoor use.
Sustainability	<p>PVC stocks require specialist facilities for recycling.</p> <p>Kavalan and mesh materials are widely recyclable.</p>